



TOTALLY DIFFERENT.



Standard 6



SA2650



Selected 50 Hz. Models

Item No. _____

C712

Soft Serve Freezer

Twist, Pump

Features

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet. Serve two separate soft serve flavors, or an equal combination of both in a twist.

Freezing Cylinder

Two, 3.4 quart (3.2 liter).

Mix Hopper

Two, 20 quart (18.9 liter). Simplified air/mix pumps deliver the precise amount of air and mix to the freezing cylinders, and reduces operator parts. Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C) during Auto and Standby modes.

Indicator Lights

Digital readout displays hours since last brush cleaning to assure product safety. Mix Low light alerts operator to add mix. Audible alarm may be enabled to sound when mix is low. When the Mix Out light flashes, the unit shuts down automatically to prevent damage.

Touch Screen Controls

Microprocessor touch controls are embedded in durable tempered glass panel. Multiple languages are selectable. Viscosity is continually measured to dispense consistent quality soft serve desserts. Temperatures in the hoppers or freezing cylinders may be displayed at any point of operation, in either Fahrenheit or Celsius. Draw counter allows operator to view number of servings dispensed.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.




Integrated Syrup Rail Option - 2 room temperature with lids & ladles, 2 heated with syrup pumps

Rockton, Illinois 61072
800-255-0626
Phone 815-624-8333 Fax 815-624-8000
www.taylor-company.com
e-mail: info@taylor-company.com

International Office
Taylor Company S.r.l.
Roma, Italy
Tel: **+39-06-420-12002** Fax: +39-06-420-12034
e-mail: romeoff@taylor-company.com

ISO 9001:2000
Registered Firm

C712 Soft Serve Freezer

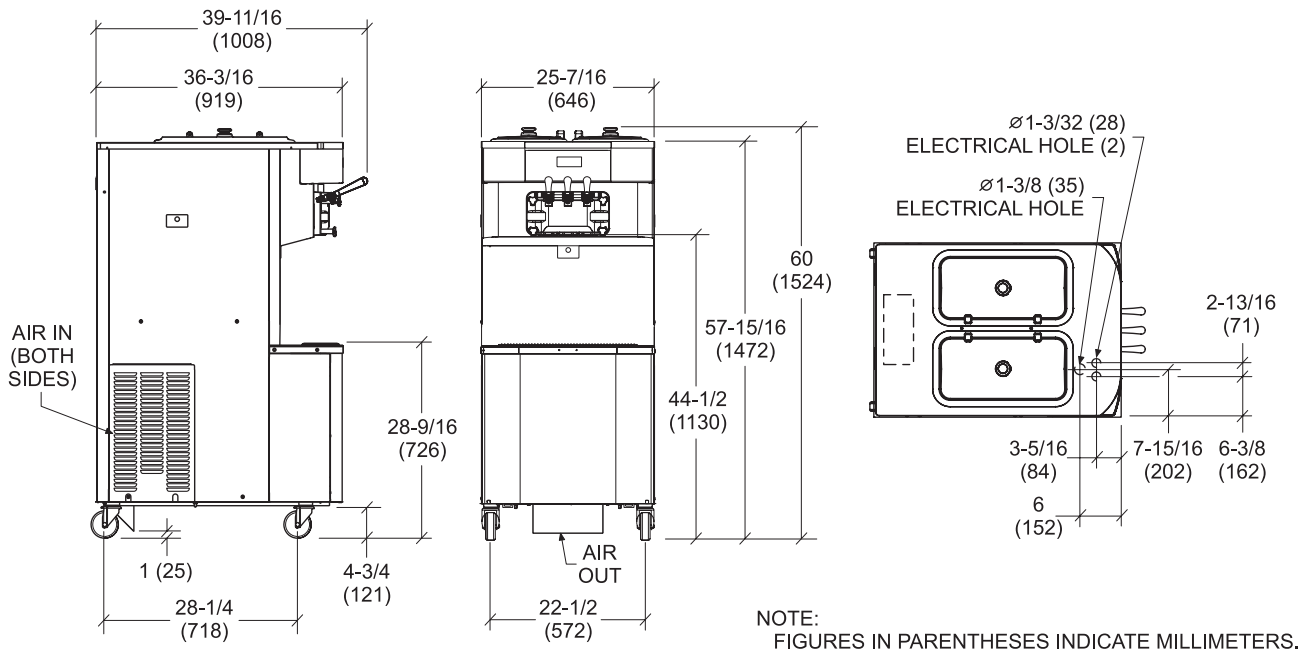

TOP VIEW - OPERATOR END
ALL CONNECTIONS LOCATED UNDERSIDE OF BASE

| | | |
|---------|---------|--------|
| Weights | lbs. | kgs. |
| Net | 748 | 339.3 |
| Crated | 875 | 396.9 |
| Volume | cu. ft. | cu. m. |
| | 66.5 | 1.88 |

| | | |
|-----------------|---------|------|
| Dimensions | in. | mm. |
| Width | 25-7/16 | 646 |
| Depth | 36-3/16 | 919 |
| Height | 60 | 1524 |
| Floor Clearance | 4-3/4 | 121 |

*Mounted on standard casters

| Electrical | Maximum Fuse Size | | Minimum Circuit Ampacity | | Poles (P) Wires (W) |
|-------------------------|-------------------|-------|--------------------------|-------|---------------------|
| | Left | Right | Left | Right | |
| 208-230/60/1 Air | 35 | 35 | 27 | 25 | 2P 3W |
| 208-230/60/1 Air, Syrup | 40 | 35 | 28 | 25 | 2P 3W |
| 208-230/60/1 Water | 35 | 35 | 26 | 25 | 2P 3W |
| 208-230/60/3 Air | 25 | 20 | 19 | 17 | 3P 4W |
| 208-230/60/3 Water | 25 | 20 | 18 | 17 | 3P 4W |
| 220-240/50/1 Air | 30 | 25 | 22 | 20 | 2P 3W |
| 380-415/50/3N~ Air | 12 | 10 | 11 | 9 | 4P 5W |

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability. (For exact electrical information, always refer to the data label of the unit)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
 Neutral: Yes No | **Cooling:** Air Water NA

Options: _____

Specifications

Electrical

Two dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

Beater Motor

Two, 1.5 HP.

Refrigeration System

Two, 9,500 BTU/hr. R404A.
 Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134a.
 (BTUs may vary depending on compressor used.)

Air Cooled

Minimum 3" (76 mm) around all sides. Install the deflector provided to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Water Cooled

Water inlet and drain connections under side of base 1/2" FPT.

Options

- Cone Dispenser
- Drain Adaptor (for ease of rinsing & cleaning)
- Draw Valve Lock Kit
- Faucet
- Hopper Locks
- Hopper Agitators
- Panel Spinner
- Syrup Rail (Integrated)
- Syrup Rail Kit (side mount)

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,
 A Division of Carrier Commercial Refrigeration, Inc.
 Rockton, Illinois 61072
 815-624-8333 **800-255-0626** Fax 815-624-8000
www.taylor-company.com

Printed in U.S.A.